

A

B

C

D

1

P1 USB AM

①

④
③
②
①

P1

1800±30MM

⑤
④
③
②
①

P2 MICRO BM

Connection

P1WireP2

1Red1

2White2

3Green3

4Black5

Shell1BraidShell1

Cable Spec:

1. Conductor: 28AWG*2C (Cu) +26AWG*2C (Cu) +AL+B

2. Coat: PVC Black.

3. OD: 4.5±0.2mm

Package: Polybag with Gembird logo

Gembird Electronics Ltd.

DrawLongTITLE:DWG NO:

Date2010.10.11USB2.0 AM/Micro BM Cable

CheckDateP/N:

CCP-mUSB2-AMBM-6CUSTOMER:

TOLERANCE:
WHOLE NOANGLEEDITION:CUSTOMER

±0.5°±0.5°1

UNIT:SCAL:

MMNONESH1DF1A4

ITEMDESCRIPTIONQTYUNITITEMDESCRIPTIONQTYUNIT

③USB Micro BM plug1SET

②USB2.0 Cable, black

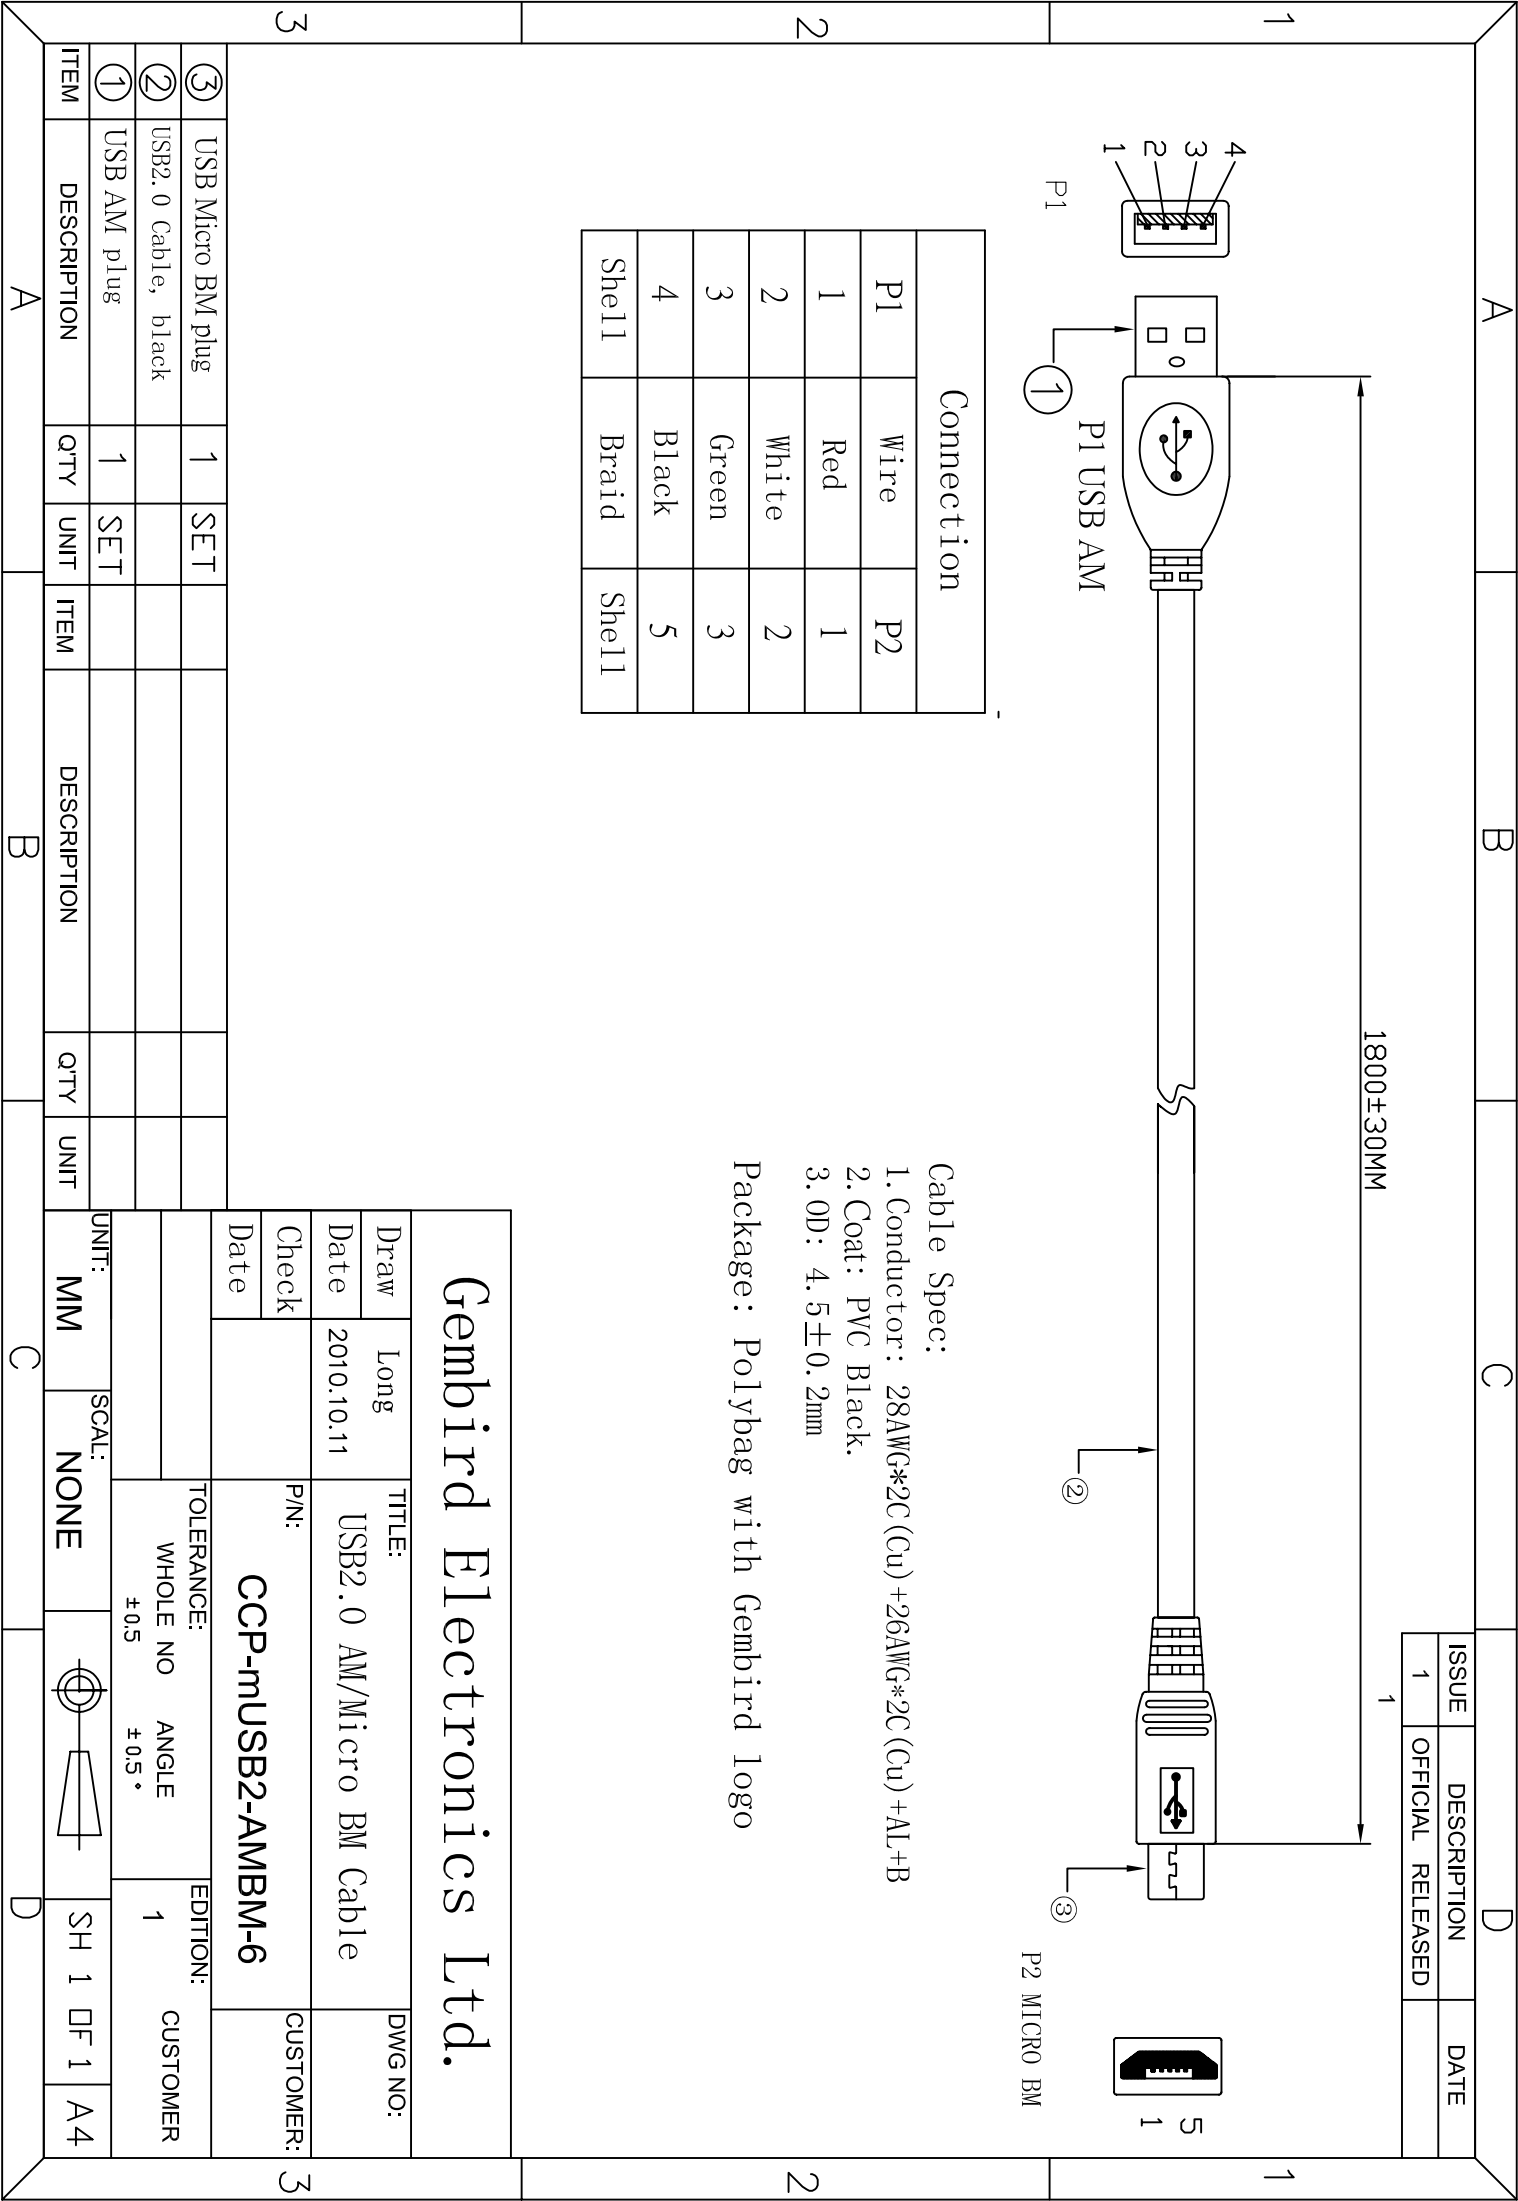
①USB AM plug1SET

A

B

C

D

[illegible][illegible]

- [illegible]

[illegible]

Connection		
P1	Wire	P2
1	Red	1
2	White	2
3	Green	3
4	Black	5
Shell	Braid	Shell

ISSUE			DESCRIPTION			DATE		
1			OFFICIAL RELEASED					

DRAW		LONG	TITLE		DWG NO:	
Date		2010.10.11	USB2.0 AM/Micro BM Cable			
Check			P/N:		CUSTOMER:	
Date			CCP-mUSB2-AMBM-6			
			TOLERANCE:		EDITION:	
			WHOLE NO ±0.5		ANGLE ±0.5°	
			1		CUSTOMER	

UNIT:		SCAL:	SH 1		DF 1	A 4
MM		NONE				

Cable Spec:

- Conductor: 28AWG*2C (Cu) +26AWG*2C (Cu) +AL+B
- Coat: PVC Black.
- OD: 4.5±0.2mm

Package: Polybag with Gembird logo

ITEM			DESCRIPTION			QTY			UNIT		
③			USB Micro BM plug			1			SET		
②			USB2.0 Cable, black								
①			USB AM plug			1			SET		
ITEM			DESCRIPTION			QTY			UNIT		