


REV.	DESCRIPTION	DATE:
00	Sample drawing	2012.04.25

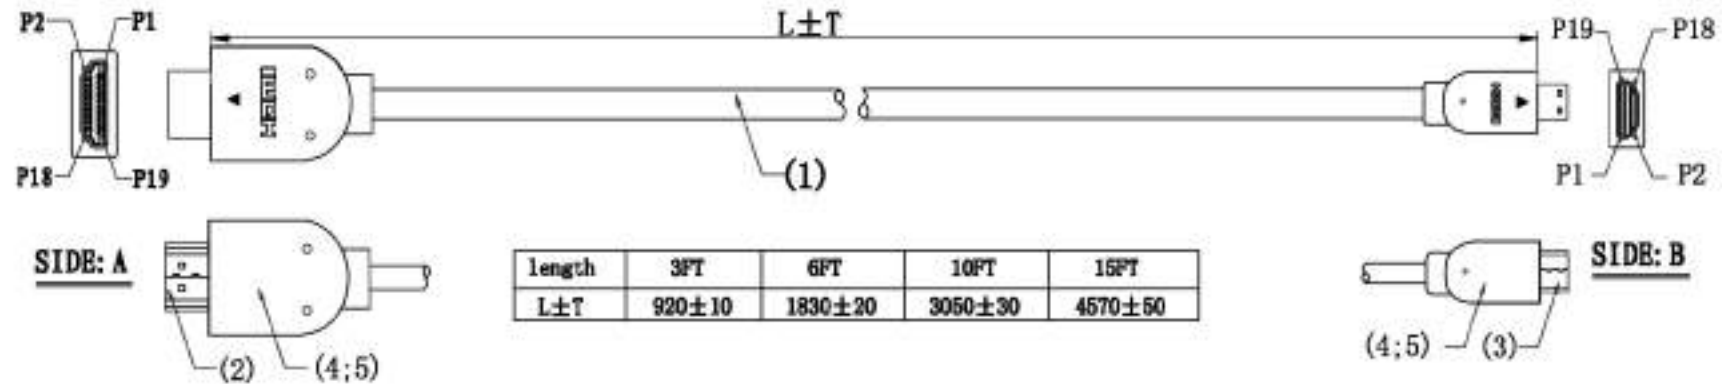

NOTE:

- (1) Cable UL20276[32#(7/0.08Tcu)*1P+ADM]*5P+32#(7/0.08Tc)*4C+
MAD(7/0.08Bc) B(16*4/0.12AL-MG)
Jacket Material:PVC OD:4.8±0.15mm
Colour:Black
Cable Printing:High Speed HDMI™ Cable E301195 AWM STYLE 20276
80℃ 30V VW-1
- (2) Connector A:HDMI A 19PIN Male Solder Type
Insulation:Black
Contact:Phosphor Bronze, Gold Plated
Shell:Gold Plated
- (3) Connector B:Micro HDMI D TYPE Male Solder Type
Insulation:Black
Contact:Phosphor Bronze, Gold Plated
Shell:Gold Plated
- (4) Over Molding Colour:PVC-45P-Black
- (5) Parameter Settings: CT-8681FA
1. Insulation Resistance:5MΩ (MIN).
2. Conductive Resistance:1.5~2.5Ω
- (6) Packing: POLYBAG Packing

SIDE:A		SIDE:B		SIDE:A		SIDE:B	
HDMI 19AM		Micro 19DM		HDMI 19AM		Micro 19DM	
1	White	3	White	10	White	12	White
3	Red	5	Red	12	Orange	14	Orange
5	Drain	7	Drain	8	Drain	10	Drain
4	White	6	White	13	Orange	15	Orange
6	Green	8	Green	14	White	2	White
2	Drain	4	Drain	19	Brown	1	Brown
7	White	9	White	17	Drain	16	Drain
9	Blue	11	Blue	15	Yellow	17	Yellow
11	Drain	13	Drain	16	White	18	White
Shell	Drain+Braid	Shell	Drain+Braid	18	Red	19	Red

GENERAL TOLERANCES
(UNLESS SPECIFIED)

LENGTH: L ± 1
.X ± 0.2
.XX ± 0.10
ANGLE: X° ± 1°
.X° ± 0° 30'



GEMBIRD ELECTRONICS LTD

<http://www.gembird.cn>

UNIT: mm	REV: 00	NAME	
DRAWING	2012.04.25	S. P. NO.	
CHECK		P. O. NO.	
APPROVE		SIZE	
		DWG. NO.	
		PAGE	1/1