



ISSUE	DESCRIPTION	DATE
1	OFFICIAL RELEASED	

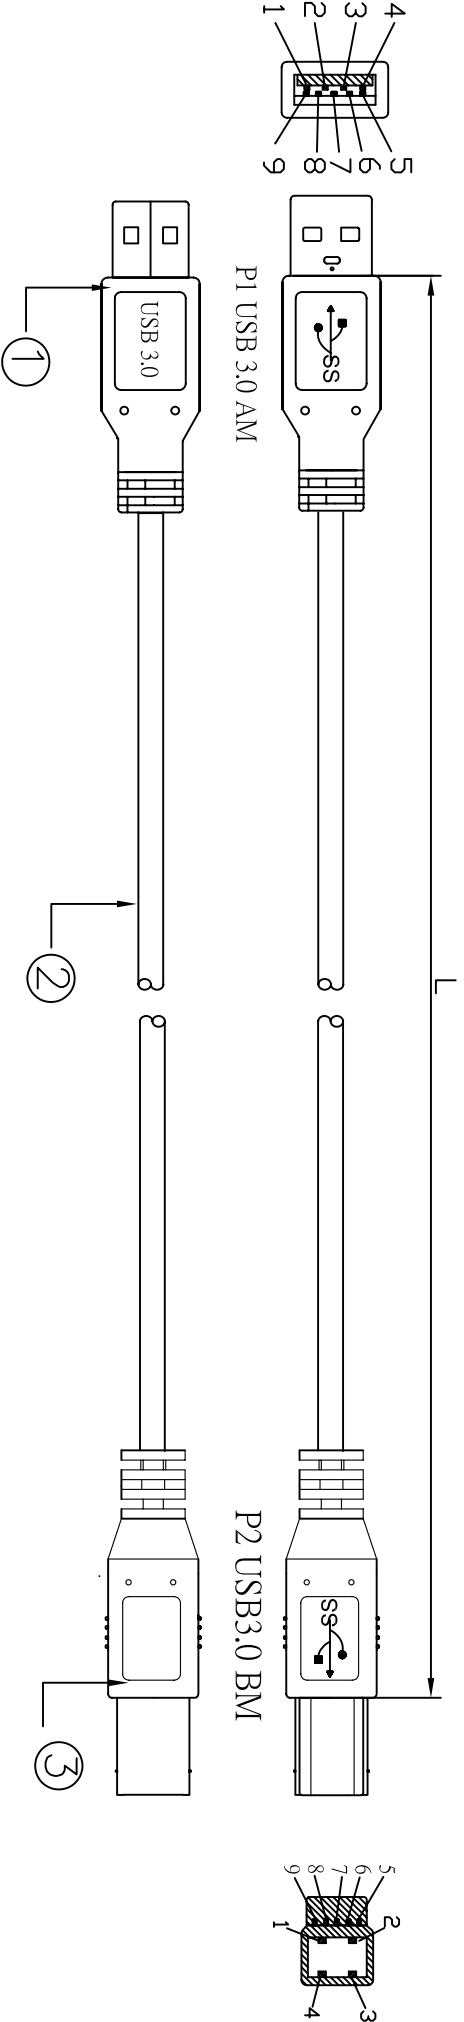

Connection

P1	1	2	3	4	5	6	7	8	9	Shell
										Braid
P2	1	2	3	4	5	6	7	8	9	Shell



"L" mm	Tolerance (mm)	P/N
1800	± 30	CCP-USB3-AMBM-6
3000	± 30	CCP-USB3-AMBM-10

Cable Spec:
1. Conductor:
(28#/1P Cu+ D+ AL) *2F+ 28#/1PCu+ 26#/2CCu+AL+ B

2. Coat: PVC Blue.
3. OD: 6. 0±0. 2mm

Package: Polybag with Gembird logo

ITEM	DESCRIPTION	QTY	UNIT	ITEM	DESCRIPTION	QTY	UNIT
③	USB3.0 BM plug	1	SET				
②	USB3. 0 Cable, blue						
①	USB3.0 AM plug	1	SET				

Gembird Electronics Ltd.

Draw	Long	TITLE:	DWG NO:
Date	2010.10.11	USB3. 0 AM/BM Cable	
Check		P/N:	CUSTOMER:
Date		CCP-USB3-AMBM-xx	

TOLERANCE:		EDITION:	
WHOLE NO	ANGLE	1	CUSTOMER
± 0.5	± 0.5 °		

UNIT:	SCAL:				
MM	NONE				



SH 1	DF 1	A4
------	------	----