


ISSUE	DESCRIPTION	DATE
1	OFFICIAL RELEASED	

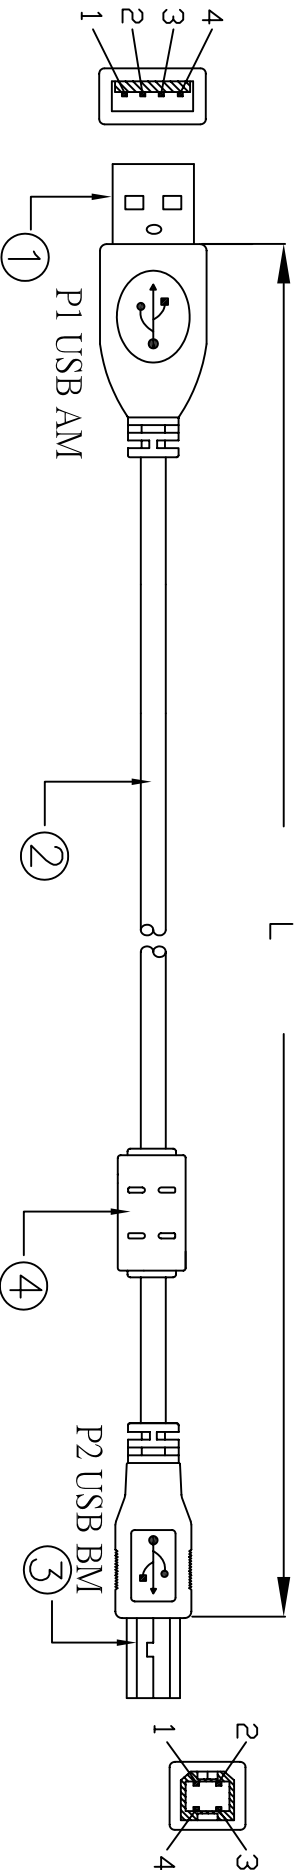

Connection		
P1	Wire	P2
1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Braid	Shell

"L"mm	Tolerance (mm)	P/N
1800	±30	CCF-USB2-AMBM-6
3000	±30	CCF-USB2-AMBM-10
4500	±50	CCF-USB2-AMBM-15

Cable Spec:
1. Conductor: 28AWG Cu*2C+24AWG Cu*2C+AL+B
2. Coat: PVC Black.
3. OD: 4.5±0.2mm


Package: Polybag with Gembird logo

③	USB BM plug	1	SET		
②	USB2.0 Cable, black				
①	USB AM plug	1	SET	④	Ferrite core
ITEM	DESCRIPTION	QTY	UNIT	ITEM	DESCRIPTION

Gembird Electronics Ltd.

Draw	Long	TITLE:	DWG NO:
Date	2010.10.11	USB2.0 AM/BM Cable	
Check		P/N:	CUSTOMER:
Date		CCF-USB2-AMBM-xx	

TOLERANCE:		EDITION:	
WHOLE NO	ANGLE	1	CUSTOMER
±0.5	±0.5°		
UNIT:	SCAL:		
MM	NONE		



SH 1 DF 1 A4